



SCHEMATIC DIAG

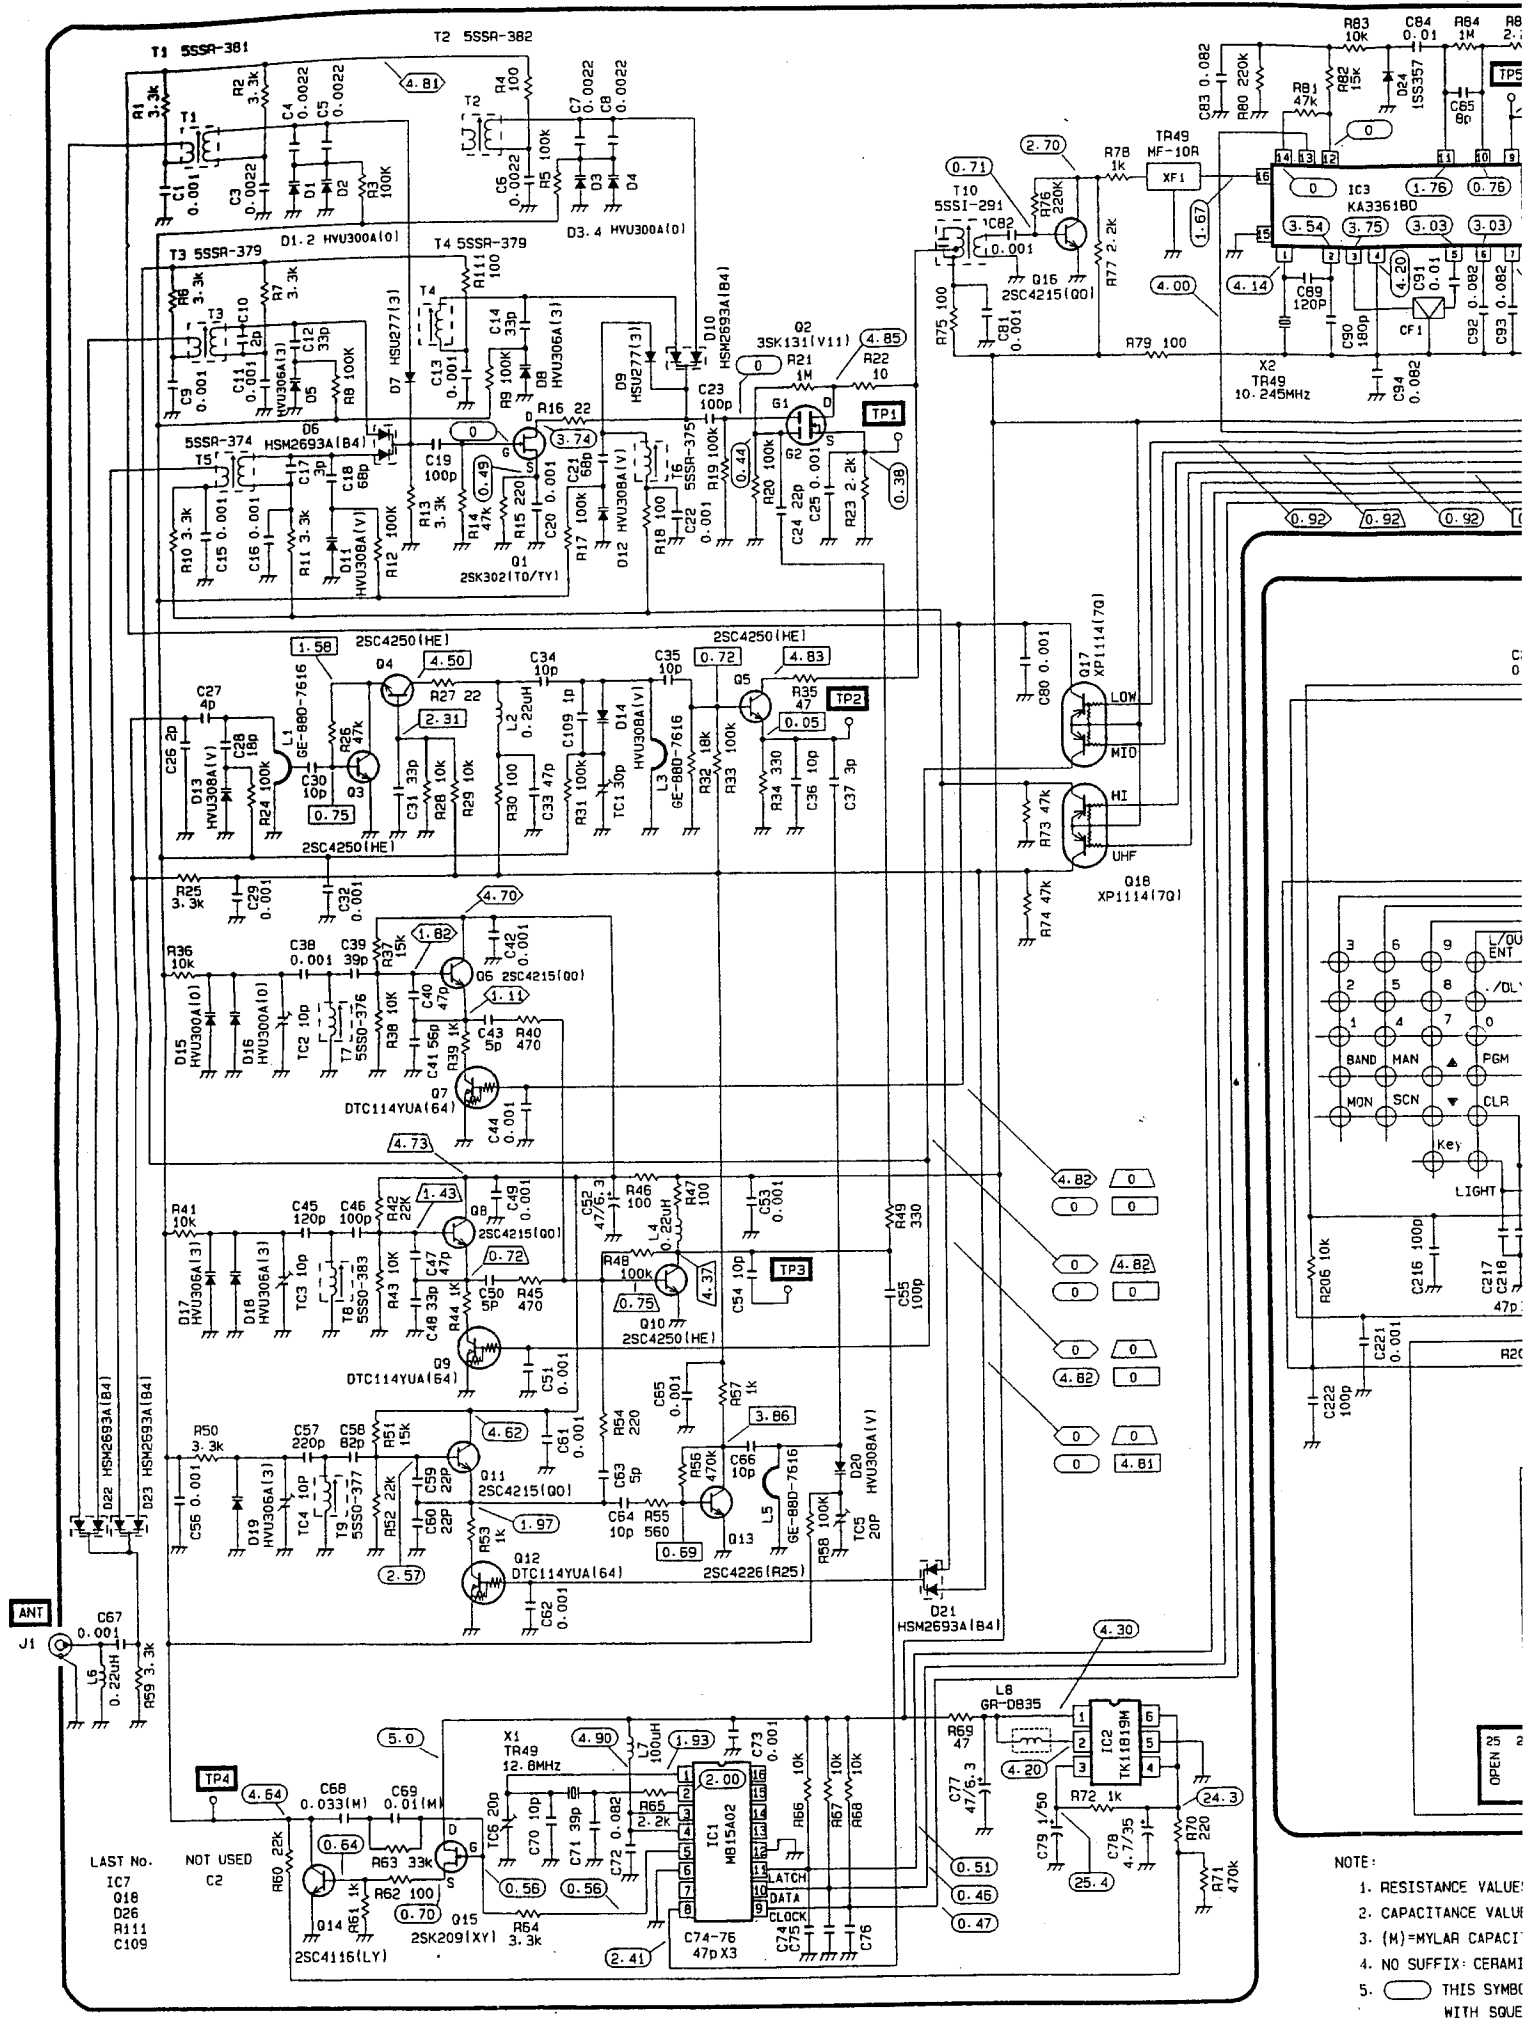

ATIC DIAGRAM / PSR 255

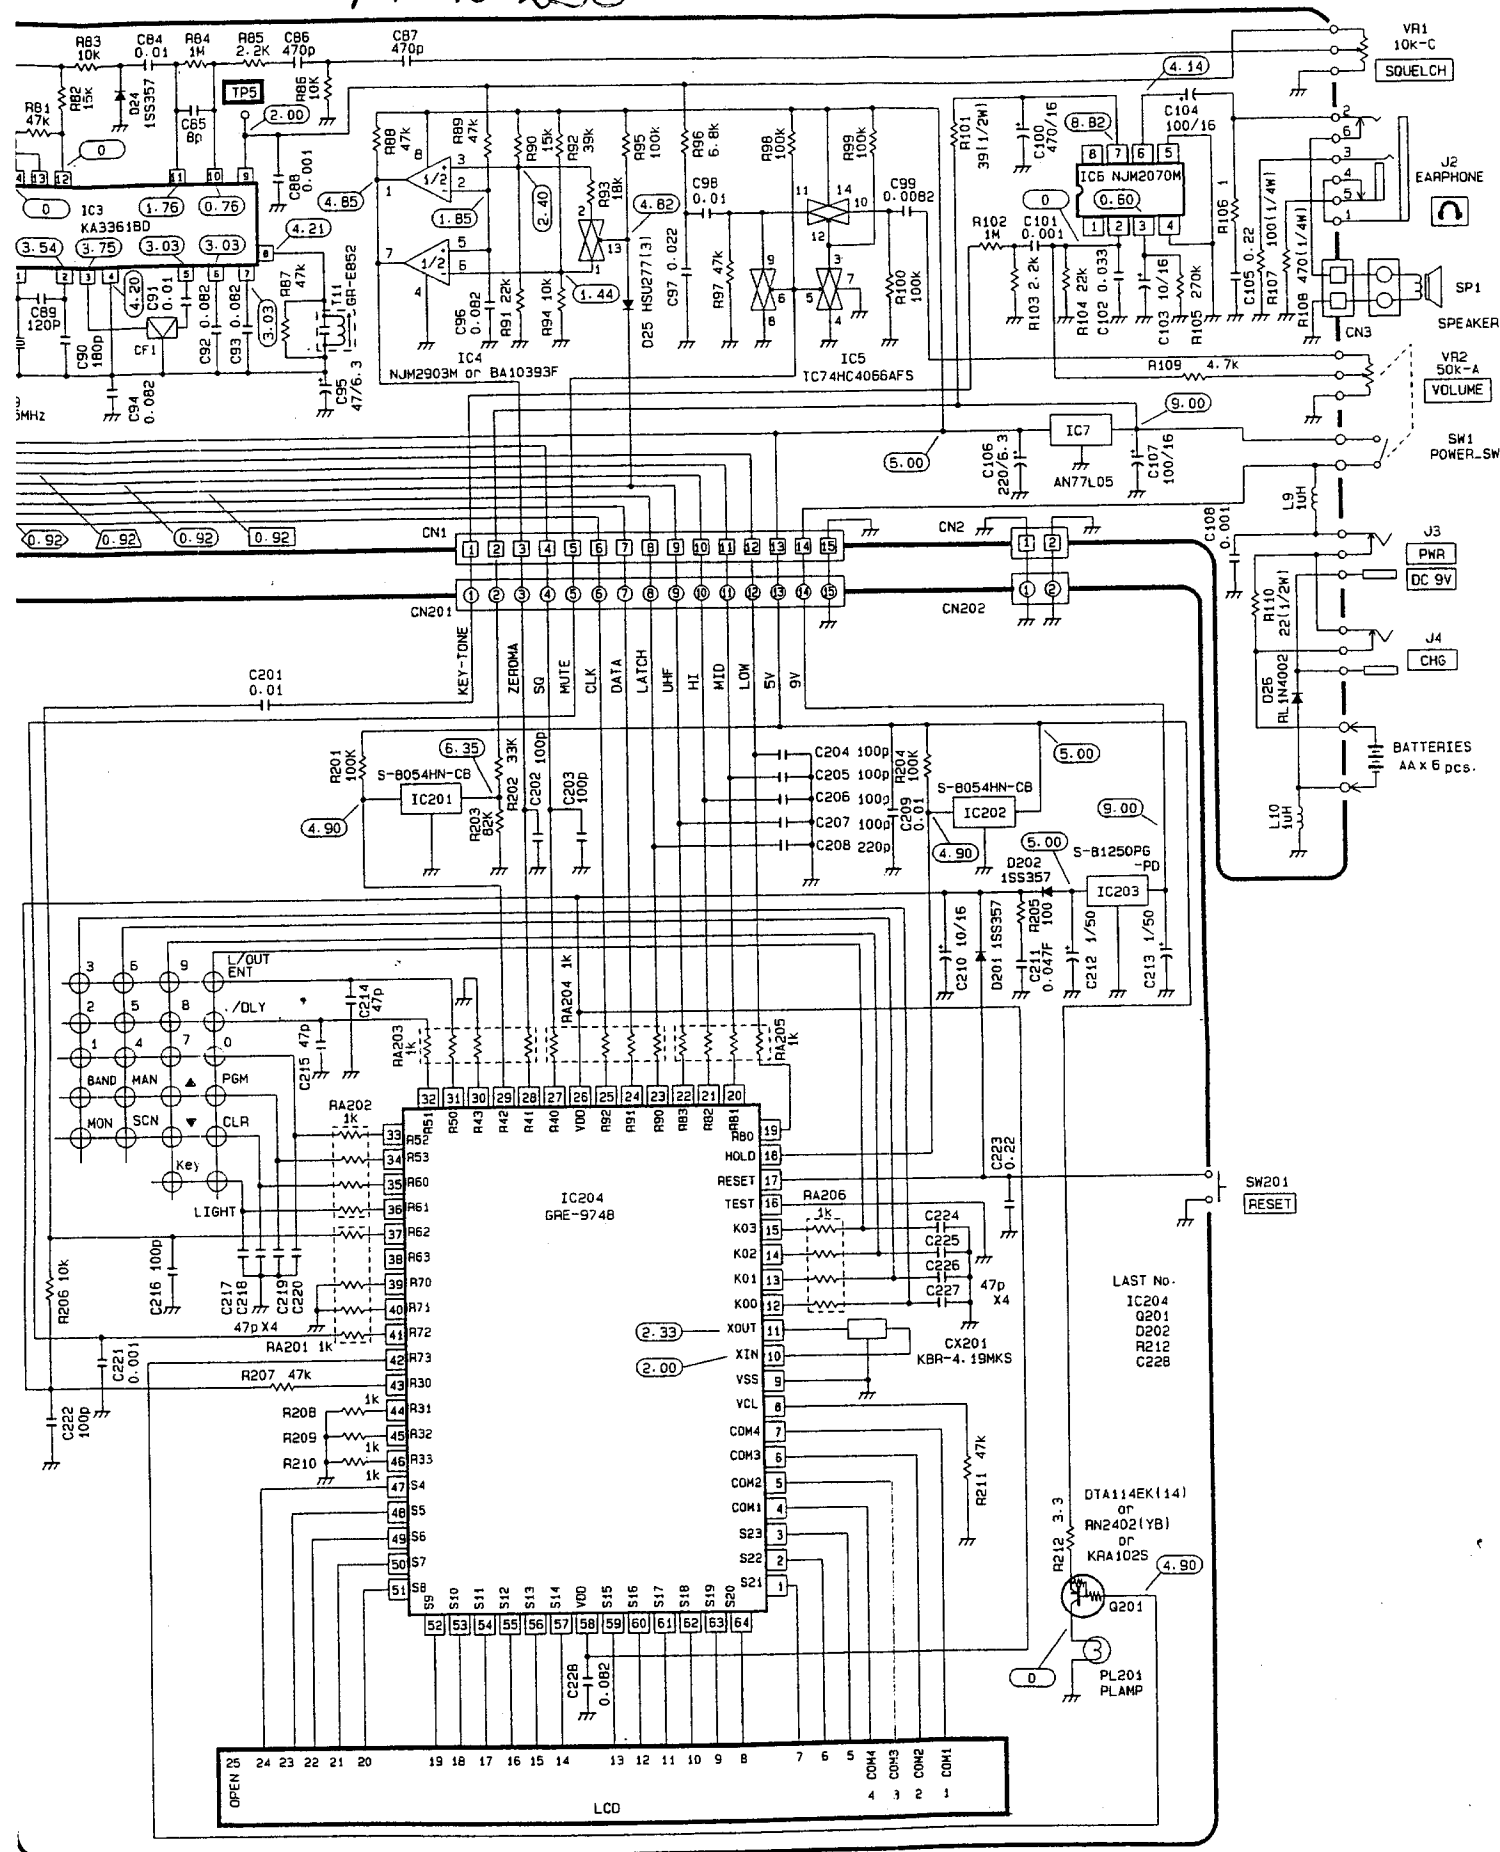

NOTE:

1. RESISTANCE VALUES ARE IN OHMS (K=1000 M=1000000).
2. CAPACITANCE VALUES ARE IN μ F (p=, F).
3. (M)=MYLAR CAPACITOR.
4. NO SUFFIX: CERAMIC CHIP CAPACITOR.
5. THIS SYMBOL DENOTES THE DC VOLTAGE ON VHF HI BAND. WITH SQUELCH CONTROL SET TO CCW POSITION.

6. THIS SYMBOL DENOTES THE DC VOLTAGE ON VHF LOW BAND.
7. THIS SYMBOL DENOTES THE DC VOLTAGE ON VHF MID BAND.
8. THIS SYMBOL DENOTES THE DC VOLTAGE ON UHF BAND.
9. ALL DC VOLTAGES ARE MEASURED WITH A 100 K Ω M/V DC VOLTMETER. WITH VOLUME CONTROL SET TO MINIMUM.