


MIDLAND 278 PLUS MULTI

Downloaded from www.cbradio.nl

MODIFICATION TO OPERATION 400CH AND OTHERS BAND ON MIDLAND 278 PLUS MULTI

- Open the radio and remove screw cap.
- Look for the three jumper OPT1,OPT2,OPT3, see you the photo

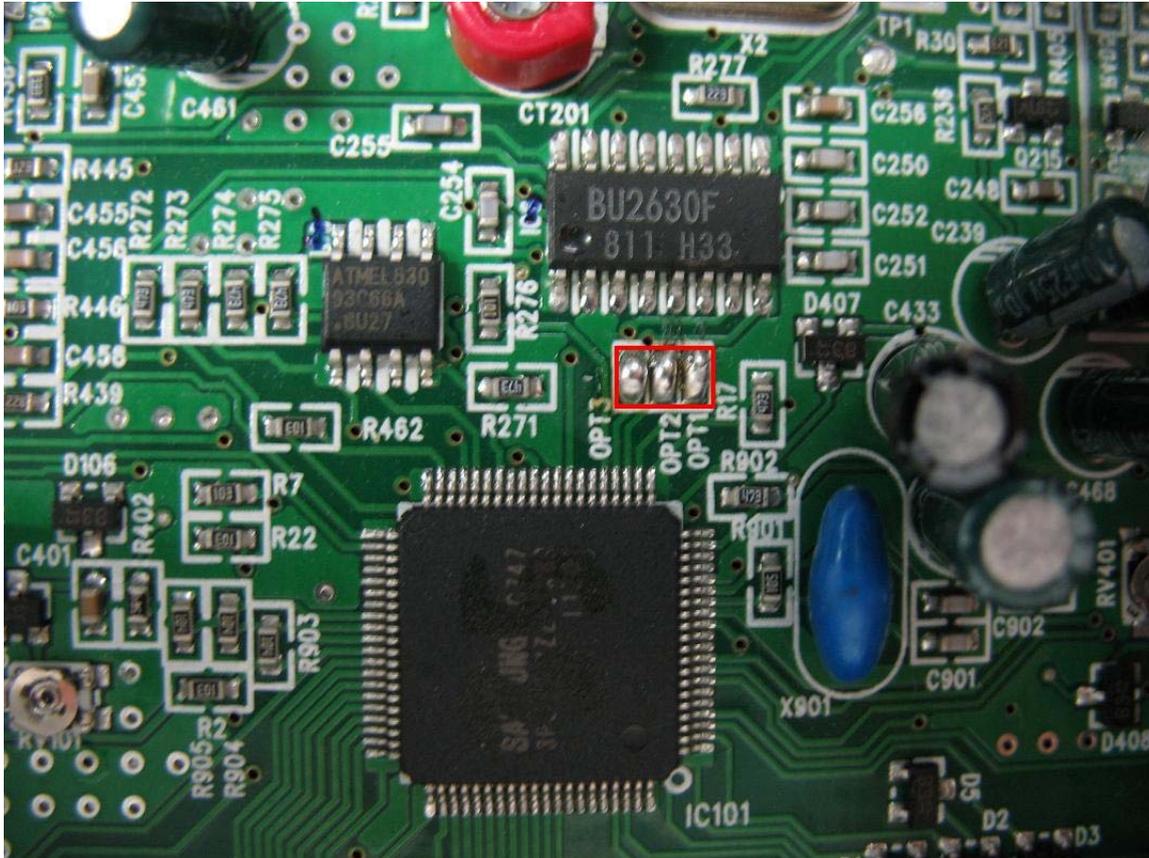

BAND	OPT1	OPT2	OPT3
SW	CLOSE	OPEN	OPEN
RU	CLOSE	OPEN	CLOSE
PX	CLOSE	CLOSE	OPEN
PC	CLOSE	OPEN	CLOSE

Selection the Band

- Power off the radio;
- Keep and hold the buttons 'AM/FM' and 'SCAN' then power on the radio.
- Turn the knob 'CHANNEL' and to select the band.
- Push the button 'AM/FM' to finish the selection.

INCREASE THE POWER OUTPUT 10W

Cut the green wire for ability the power output a 10 Watt.
The trimmer power RV201. See you picture below

