

# Cobra<sup>®</sup> microTALK

MT800-2 EVP EU

Walkie Talkie  
Handfunkgerät  
Talkie Walkie  
Transceptor

Licence Free  
Lizenz Frei  
Permis Librement  
Licencia Libremente

**8**  
CHANNELS  
**121**  
PRIVACY  
CODES

**968**  
PRIVACY  
COMBINATIONS

**VOX**  
HANDS-FREE  
OPERATION

**BABY  
MONITOR**

**SCAN**  
CHANNELS/PRIVACY  
CODES

**CALL  
ALERT**  
10 SELECTABLE  
TONES

**DUAL  
WATCH**

**KEY  
LOCK**

UP TO  
**5**  
KM  
RANGE



Radios shown  
actual size  
and have a  
1 year warranty

COMMUNICATES  
WITH ALL OTHER  
PMR 446 RADIOS




**17 LANGUAGE  
INSTRUCTION MANUAL**



**RECHARGEABLE NIMH  
BATTERIES INCLUDED!**



**2** EARBUD MICROPHONES INCLUDED!

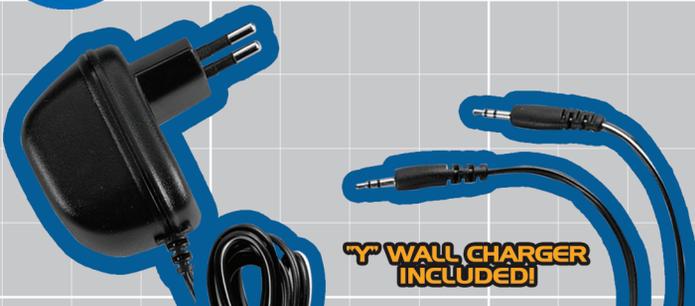

**WALL CHARGER  
INCLUDED!**

8 Channels • 121 Privacy Codes • VOX • Baby Monitor • Call Alert (10 selectable tones)  
Dual Watch • Roger Beep (selectable on/off) • Backlit LCD Display • Key Lock  
Scan (channels/privacy codes) • Speaker/Microphone/Charge Jack • Belt Clip  
Battery/Power Saver • Battery Low Indicator • Keystroke Tones (selectable on/off)



**MT 800-2 EVP EU**  
 LICENCE FREE  
**Walkie Talkie**

FEATURES	BENEFITS
UHF/FM 500mW Output Power	Ultra-clear long distance reception.
Up to 5km Range	Range will vary depending on terrain and conditions.
8 Channels	Front panel push buttons give you easy access to all 8 PMR channels.
121 Privacy Codes	38 CTCSS (Continuous Tone Coded Squelch System) codes and 83 DCS (Digitally Coded Squelch) codes provide a total of 121 privacy codes. 968 privacy combinations are possible when the 8 channels are combined with the 121 privacy codes.
VOX (Voice Activated Transmission)	User's voice is detected and the radio transmits without the need to press any buttons, freeing the user's hands for other tasks. 5 VOX sensitivity levels allow user to select at which point the radio will detect their voice.
Baby Monitor	Allows radio to monitor a baby whenever a sound is detected.
Scan	Allows user to scan either channels, CTCSS privacy codes within a channel, or DCS codes within a channel to locate conversations in progress.
Dual Watch	Programmable two location scan allows user to monitor two different Dual Watch Locations (channel or channel/privacy code) simultaneously.
Call Alert (10 selectable tones)	Provides up to 10 easily recognizable call alert tones for incoming calls.
Roger Beep Tone (selectable on/off)	Confirmation tone indicates the completion of your transmission, and signals to others it's clear to talk. This feature is selectable and may be turned on or off.
Keystroke Tone (selectable on/off)	Confirms key activation. This feature is selectable and may be turned on or off.
Key Lock	When activated, provides key pad security eliminating accidental channel changes.
Power Saver	A unique circuit extends the life of your batteries. If there are no transmissions within 10 seconds, the unit will automatically switch to battery saver mode.
Maximum Range Extender	Provides extended range reception.
Auto Squelch	Automatically shuts off weak transmissions or unwanted noise due to terrain or range constraints.
Backlit LCD	Maximum ease of use even at night.
Speaker/Microphone/Charger Jack	Allows use of wall charger or earphone speaker/microphones for "hands-free" operation.
Multilingual Manual	Includes a 17 language instruction manual.
No Licence or Service Fees	High quality band frequencies with no fees.
Belt Clip	Secures your microTALK radio while on the go.
<b>INCLUDED ACCESSORIES</b>	
"Y" Wall Charger	Charges supplied rechargeable batteries inside radios. Charger accomodates one or two radios (230v/2-pin EU plug).
8AAA NiMH Rechargeable Batteries	Each radio can also be used with 4 AAA non-rechargeable alkaline batteries (not included).
2 Earbud Microphones	Earbud microphones with "push to talk" free hands for other tasks.

SPECIFICATIONS	
Unit Dimensions	144.4 mm H x 59 mm W x 29.4 mm D (5.7" H x 2.3" W x 1.2" D) including antenna
Unit Weight	90.0 g (3.2 oz) Without batteries
RF Output	500 mW
Channels	8 CH 1 = 446.00625 MHz 2 = 446.01875 3 = 446.03125 4 = 446.04375 5 = 446.05625 6 = 446.06875 7 = 446.08125 8 = 446.09375
SKU#	MT 800-2 EVP EU
Batteries	4 AAA NiMH rechargeable batteries (included) or 4 AAA alkaline batteries per radio (not included)
UPC	0-28377-90778-4
Master Pack Barcode	10028377 90778 1
Clamshell Dimensions	268 mm H x 193 mm W x 180 mm D (10.6" H x 7.6" W x 3.2" D)
Clamshell Weight	570 g (19.3 oz.)
Master Pack Quantity	4
Master Pack Dimensions	279.4 mm H x 215.9 mm W x 299.7 mm D (11" H x 8.5" W x 11.8" D)
Master Pack Weight	2790 g (95.4 oz.)

Specifications subject to change without notice.

**MANUAL LANGUAGES**

English	Norwegian
Czech	Polish
Danish	Portuguese
Dutch	Romanian
Finnish	Serbian
French	Spanish
German	Swedish
Greek	Turkish
Hungarian	

**Nothing Comes Close to a Cobra®**

Cobra®, microTALK®, Nothing Comes Close to a Cobra® and the snake design are registered trademarks of Cobra Electronics Corporation, USA. Cobra Electronics Corporation™ is a trademark of Cobra Electronics Corporation, USA. CEEL® is a registered trademark of Cobra Electronics Europe LTD.