


ALINCO

Automatic Random Wire Antenna Tuner

EDX-2

1.6MHz to 30MHz 200W-pep

Alinco's EDX-2 is an automatic antenna tuner that matches a transceiver to a random wire antenna of over 3 meters in length (3.5MHz and above), or over 12 meters in length (1.6MHz and above). The EDX-2 comes installed with 5 meters of co-axial and control cables for instant operation with Alinco HF Transceiver DX-70 or DX-701, and the cables may be extended at user's option.

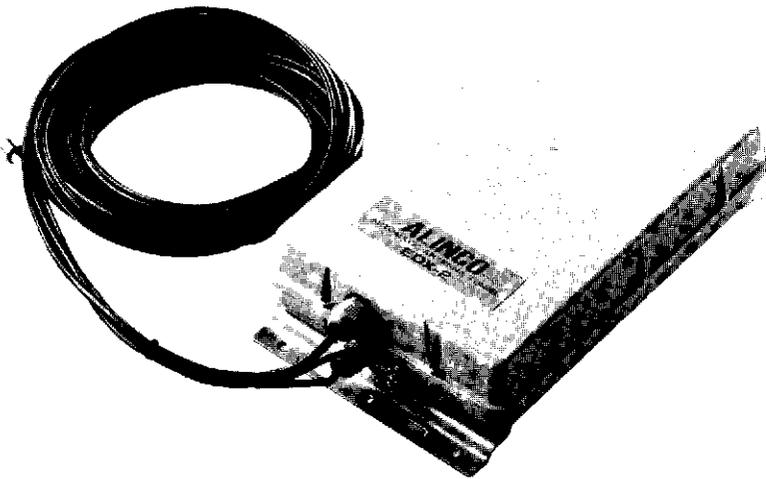

■ SPECIFICATIONS

Frequency Range: 3.5MHz ~ 30MHz
(with over 3 meter element)
1.6MHz ~ 30MHz
(with over 12 meter element)

Input Power (Max.): 200W P.E.P.

Input impedance: 50Ω


Power for tuning: 7 ~ 20W

Operating Voltage: 13.8VDC ± 10%

Design and specifications are subject to change without notice or obligation. All values approximate.

Names of products mentioned in this catalog are used for identification purpose only and may be trade marks or registered trademarks of their respective company.

■ MOUNTING EXAMPLES

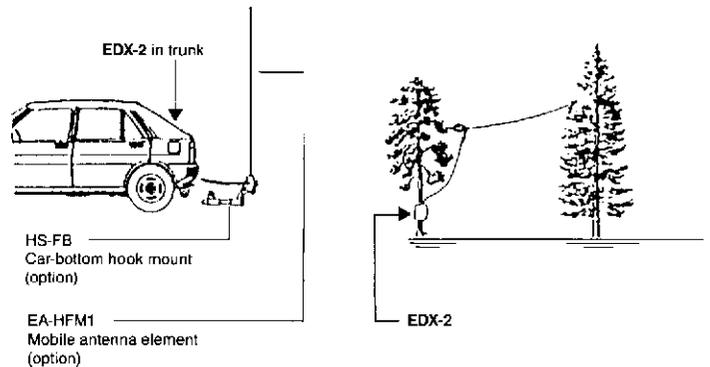

Authorized Dealer:

ALINCO, INC.

Head Office: "TWIN 21" MID Tower Building 25F
1-61, 2-Chome, Shiromi, Chuo-ku, Osaka 540, Japan
Phone: 06-946-8150 Fax: 06-946-8175 Telex: 63086
E-mail: 101243.1446@compuserve.com

U.S.A.: 438 Amapola Ave., Suite 130, Torrance, CA 90501-6201, U.S.A.
Phone: 310-618-8618 Fax: 310-618-8758
<http://www.alinco.com/>

Germany: Eschborner Landstrasse 55, 60489 Frankfurt am Main, Germany
Phone: 069-786018 Fax: 069-789-60766